
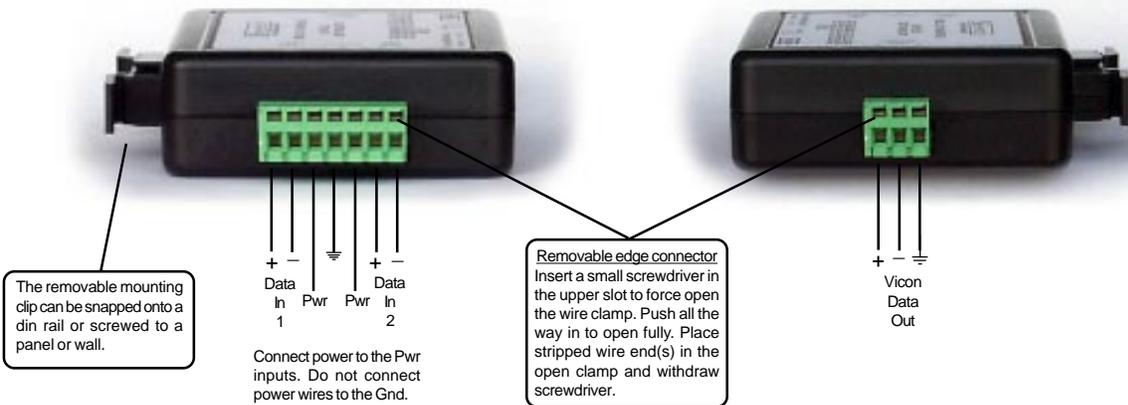


SCM-200-Vicon

Vicon RS-422 Camera Control Two Input Code Merger

Merges data from two Vicon RS-422 camera control lines into a single data line. Individual input and output baud rates are switch selectable from 2400 baud to 19,200 baud. Input #2 camera addresses can be offset in groups of 16 up to a maximum offset of 112.

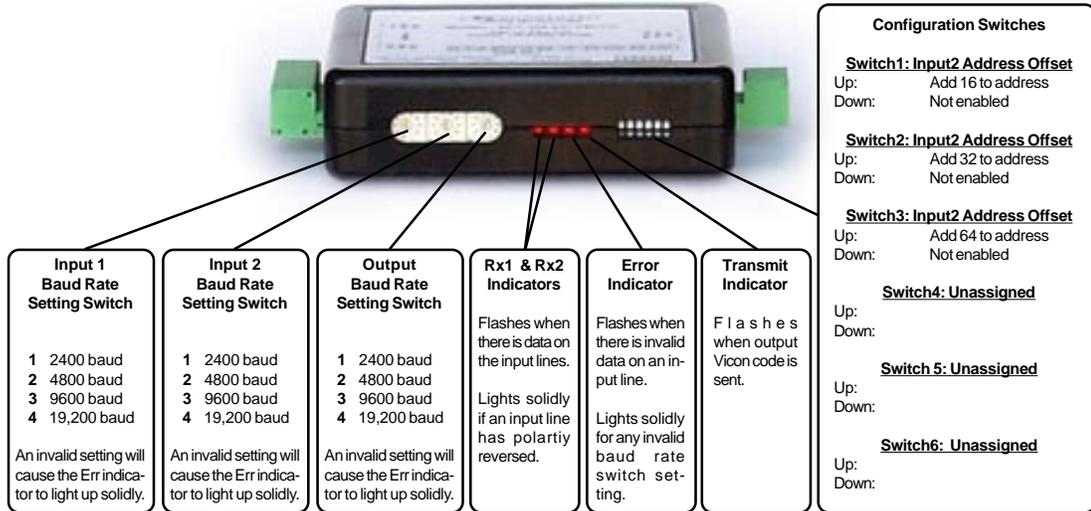

SPECIFICATIONS

Size: 4.5" x 3.5" x 1.25"
 Weight: 0.5 lb
 Power: 9Volt to 15Volt AC or DC at 75ma
 Environmental: Indoor use only

OPTIONS

Each input can optionally be ordered as RS-232

Sennetech, Inc. 6455 W. Bath Rd. Perry, MI 48872, U.S.A. Ph (517) 675-1150 Fax (517) 675-1151

www.sennetech.net

NOTES

Input #2 Address Offset

Switches 1, 2, and 3, when turned on, add 16, 32 and 64 respectively to the camera address for any data on input number 2.

The maximum camera address is 256. If the resulting address exceeds 256, there will be no output.

This can be used for applications with multiple DVRs which have camera control outputs for camera addresses 1~16. Here are some possible combinations.

